


**DISPLAY**

**Patent number:** JP2001102166  
**Publication date:** 2001-04-13  
**Inventor:** NISHIKAWA RYUJI; YAMADA TSUTOMU  
**Applicant:** SANYO ELECTRIC CO LTD  
**Classification:**  
- **International:** H05B33/04; G09F9/00; H05B33/14  
- **European:**  
**Application number:** JP19990277088 19990929  
**Priority number(s):**


**Also published as:**

 **US6590337 (B1)**

**Abstract of JP2001102166**

**PROBLEM TO BE SOLVED:** To prevent peeling between the substrates, in the display formed by bonding the opposed substrates with seal 11.

**SOLUTION:** Display area is flattened by covering a switching element 2 with flat insulating membrane 21, a pixel electrode 4 being arranged thereon. On the pixel electrode 4, a photogenic layer 5 and an opposed electrode 5 are arranged. Flat insulating membrane 21 is extended to the low part of the seal in the outer part of the display. The flat insulating membrane 21 has a buffering layer to absorb the stress generated on hardening and prevent peeling of the substrate 1 and a protective wicker basket 10.

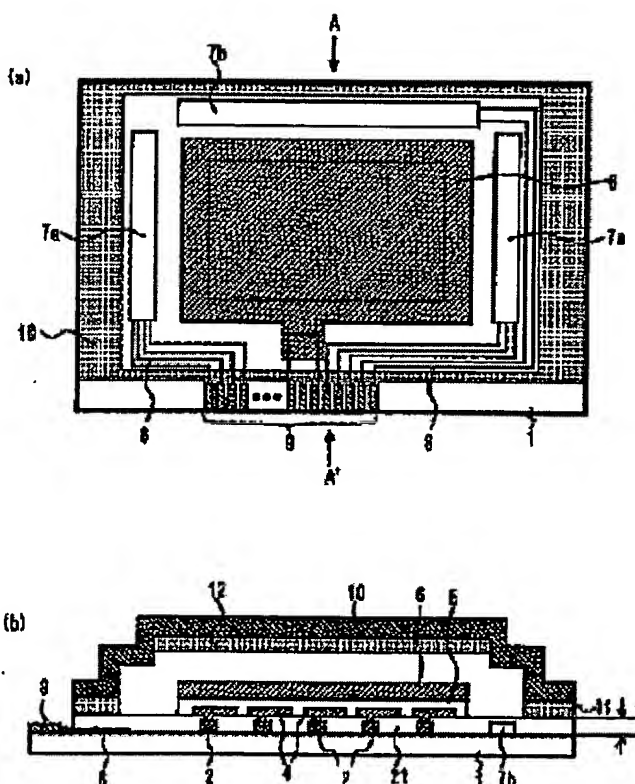

Data supplied from the esp@cenet database - Worldwide

**BEST AVAILABLE COPY**